

# INSTALLATION INSTRUCTIONS

## SAF SERIES OUTLET BOXES

### WARNING!

1. TO PREVENT RISK OF ELECTRICAL SHOCK DEACTIVATE/DISCONNECT POWER SUPPLY BEFORE INSTALLING OR RELAMPING FIXTURE.
2. TO REDUCE RISK OF FIRE OR EXPLOSION, DO NOT INSTALL WHERE THE MARKED OPERATING TEMPERATURE EXCEEDS THE IGNITION TEMPERATURE OF THE HAZARDOUS ATMOSPHERE(S).
3. THIS FIXTURE SHOULD BE INSTALLED BY QUALIFIED TECHNICIANS IN STRICT ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ANY LOCAL REQUIREMENTS.

### INSTALLATION

**READ AND FOLLOW ALL SAFETY INSTRUCTIONS BEFORE INSTALLING THIS OUTLET BOX**

This outlet box must be grounded in strict accordance with the National Electrical Code or any local requirements. Failure to properly ground this outlet box will create an electrical shock hazard which can cause serious injury or death.

#### PENDANT AND STANCHION OUTLET BOXES

Install the Outlet Box to the previously installed conduit. A minimum of 3 threads must be fully engaged between the conduit and the outlet box.

Tighten the conduit locking screw (1) to 30 inch-pounds.





#### CEILING AND WALL MOUNT OUTLET BOXES

Install the Outlet Box securely to the mounting surface by means of 1/4-20 mounting bolts (not provided).

Two mounting bolts are required for Ceiling Mount and four mounting bolts are required for Wall mount outlet boxes.

Install conduits. Plug any unused conduit with the close-up plugs provided.

A minimum of three full threads must be engaged when installing conduit or close-up plug.

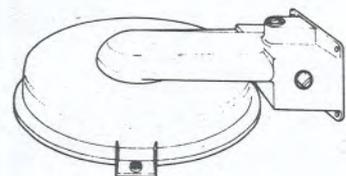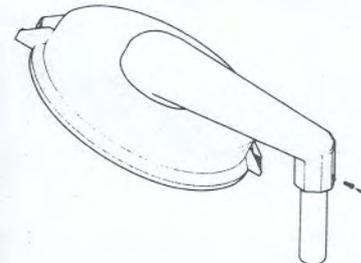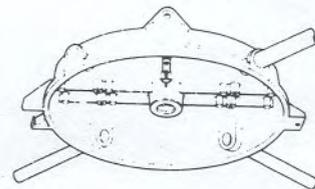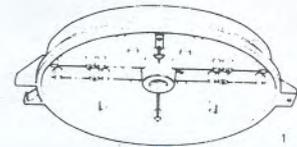

**AZZ | R - A - L™**

Rig-A-Lite Partnership, Ltd.

8500 Hansen Road • Houston, Texas 77075

Phone: (713) 943-0340 • Fax (713) 943-8354 • [www.rigalite.com](http://www.rigalite.com)

Revised 2007