

NMF2 Series

Non-metallic fluorescent lighting for wet and damp locations

NMF265-2-4


Coefficients of Utilization

% Effective Ceiling Cavity Reflectance rcc	80			50			10		
% Wall Reflectance rw	50	30	10	50	30	10	50	30	10
Room Cavity Ratio RCR	Effective Floor Cavity Reflectance 20%								
0	.81	.81	.81	.74	.74	.74	.65	.65	.65
1	.68	.65	.61	.62	.59	.57	.54	.53	.51
2	.58	.53	.48	.46	.41	.37	.41	.37	.34
3	.51	.44	.39	.52	.47	.42	.46	.42	.39
4	.45	.38	.33	.41	.35	.31	.36	.32	.29
5	.40	.33	.28	.36	.31	.27	.32	.28	.25
6	.35	.29	.24	.32	.27	.23	.29	.25	.22
7	.32	.26	.21	.29	.24	.20	.26	.22	.19
8	.29	.23	.19	.27	.22	.18	.24	.20	.17
9	.27	.21	.17	.25	.19	.16	.22	.18	.15
10	.24	.19	.15	.23	.18	.14	.21	.17	.14

Candlepower Distribution

Deg.	Parl.	22.5	45	67.5	Norm
0	961	961	961	961	961
5	919	926	948	952	964
15	919	926	948	934	964
25	852	872	910	896	950
35	754	786	848	829	916
45	625	668	765	747	860
55	467	541	660	631	783
65	298	388	539	483	669
75	124	232	380	387	521
85	153	116	273	348	426
90	6	83	238	313	387

Photometric Data

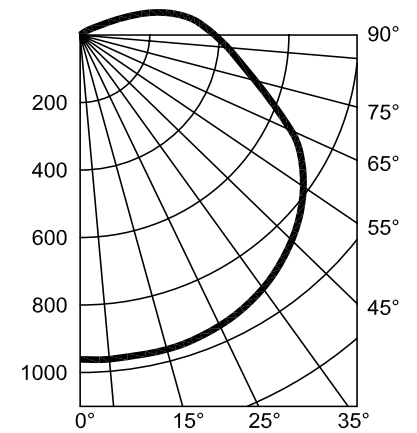

Note:

All data provided for two 32W, rapid start, cool white F40CW/RS/WM lamps.

Lamps rated for 2850 lumens per lamp. Use 1.509 multiplier for 60W F48T12/HO high output lamps.

Accessories


Photo Cell Kit

Catalog Number:

SPH25-120

Shipping Weight:

0.25 lbs.



An Avail Infrastructure Solutions Company

availinfra.com/rig-a-lite

8500 Hansen Road,
Houston, TX 77075
(713) 943-0340