

# EXA09

Telescoping/retractable pole for LED lighting



## EX-SERIES

### Globally certified protection for hazardous environments

The RIG-A-LITE EX-Series meets IECEx and ATEX standards, providing compliance, durability, and safety for hazardous locations. Designed for the Middle East, North Africa, Southeast Asia, and other ATEX/IECEx-certified regions, the EX-Series delivers reliable performance in extreme conditions.

#### Electrical Information


- Compressed Height: 1670 mm
- Extended height: 2740 mm
- Length of exposed wire: 300 mm
- Cable voltage: 750v
- Cable dimensions (AWG): 3\*1.5mm<sup>2</sup>

#### Dimensions & Material

- 100mm circum. x 2760 mm
- Weight: 15 kg
- 304 stainless steel, Q235 structural steel, polyvinyl chloride, 6061 aluminum with hot dip galvanized finish
- IP66

#### Lifespan

- Cable temperature: -40°C to 105°C
- Max Luminaire Weight: 50 lbs
- 5-year warranty

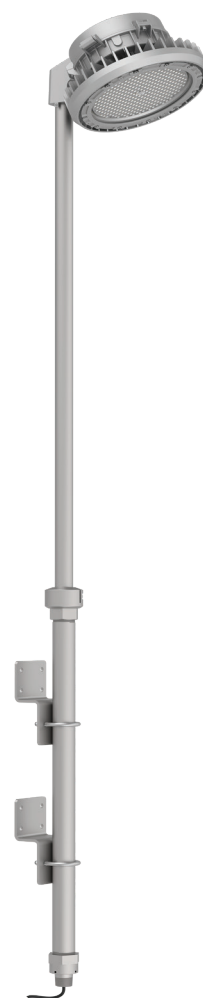

[availinfra.com/rig-a-lite](http://availinfra.com/rig-a-lite)

8500 Hansen Road  
Houston, TX 77075  
(713) 943-0340

# EXA09

## Telescoping/retractable pole for LED lighting

### Mounting Options

Tubular Rail Mount





Angular Rail Mount



Inclined Rail Mount





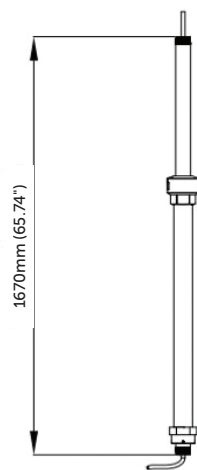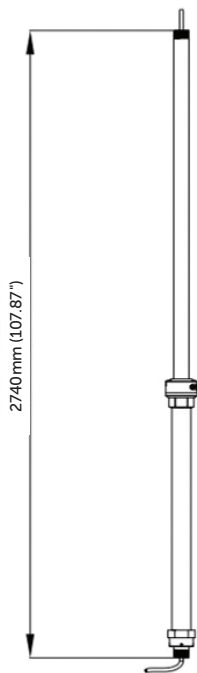

Wall Mount



## EXA09

### Telescoping/retractable pole for LED lighting

#### Accessories

	Catalog No.	Size (in.)	Shipping Weight (lbs.)
<b>Tubular Rail Mount Bracket</b> 	BC-EXA09-02	7.48" x 4.78" x 1.97"	2.71 lbs (pair)
<b>Angular Rail Mount Bracket</b> 	BC-EXA09-01	9.84" x 5.12" x 1.97"	6.33 lbs (pair)
<b>Inclined Rail Mount Bracket</b> 	BC-EXA09-03	9.29" x 4.65" x 3.94"	6.45 lbs (pair)
<b>Wall Mount Bracket</b> 	BC-EXA09-04	5.12" x 9.53" x 3.46"	11.79 lbs (pair)



[availinfra.com/rig-a-lite](https://availinfra.com/rig-a-lite)

8500 Hansen Road  
Houston, TX 77075  
(713) 943-0340