

INSTALLATION DATA SHEET

FPHB SERIES

LED LUMINAIRE FOR USE IN DAMP and WET LOCATIONS

IP69, IP66 and TYPE 4X, HIGH PRESSURE HOSE DOWN RATED

UL and NSF LISTED

WARNING!


- These luminaires should be installed by qualified technicians using suitable wiring methods in strict accordance with the National Electrical Code, NFPA 70 and any local requirements.
- To prevent risk of electrical shock, deactivate/ disconnect power supply before opening the luminaire. Keep tightly closed when in operation.

INSTALLATION: Mounting:

1. This luminaire is equipped with a 3/4 NPT threaded hub located at the top.
2. The luminaire can be suspended by means of 3/4" rigid conduit, or conduit fittings.
3. Secure any fitting entering the luminaire with the set screw provided on top near the opening.
4. To prevent water from entering the luminaire, all fittings must be properly sealed.

WIRING:

1. Before installing, make sure that the circuit is deactivated.
2. This unit is furnished completely assembled. Before installing, check the luminaire label to ensure correct voltage and frequency. The LED driver in this luminaire is designed to operate on grounded neutral systems only.
3. Connect L1 to the Black wire, the Neutral to the White wire and Ground wire to Green.

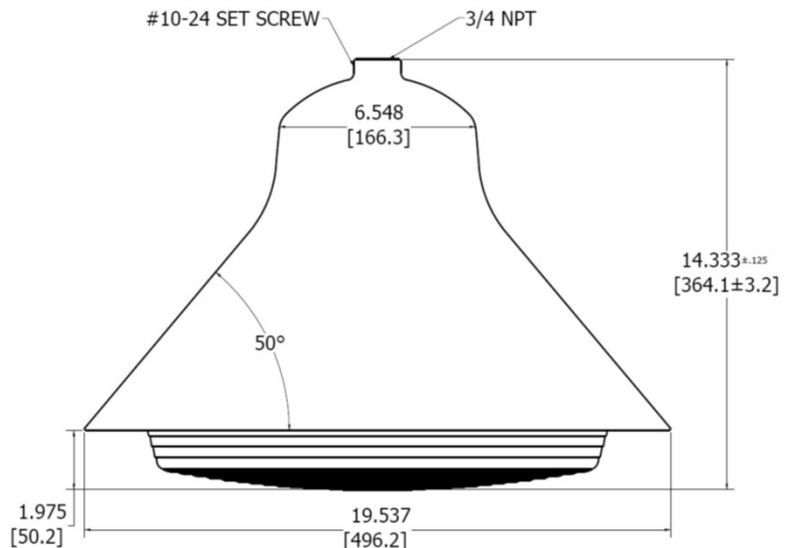

8500 Hansen Rd.
Houston, TX 77075 USA
FPHBIDS

Tel: 713-943-0340

Oct 2022

availinfra.com/rig-a-lite/

Rev. 1

INSTALLATION DATA SHEET


OPERATIONAL DATA:

1. Operate this luminaire at its rated voltage. See the luminaire label for data.

MAINTENANCE DATA:

1. Although no routine maintenance is required to keep this luminaire functional, it should be checked periodically to ensure it is working properly, and to look for any external damage.
2. For optimum performance, keep the light transmission portion of the luminaire clean. Use no solvents, clean only with a damp cloth and mild soap mixture.

WIRING DIAGRAM

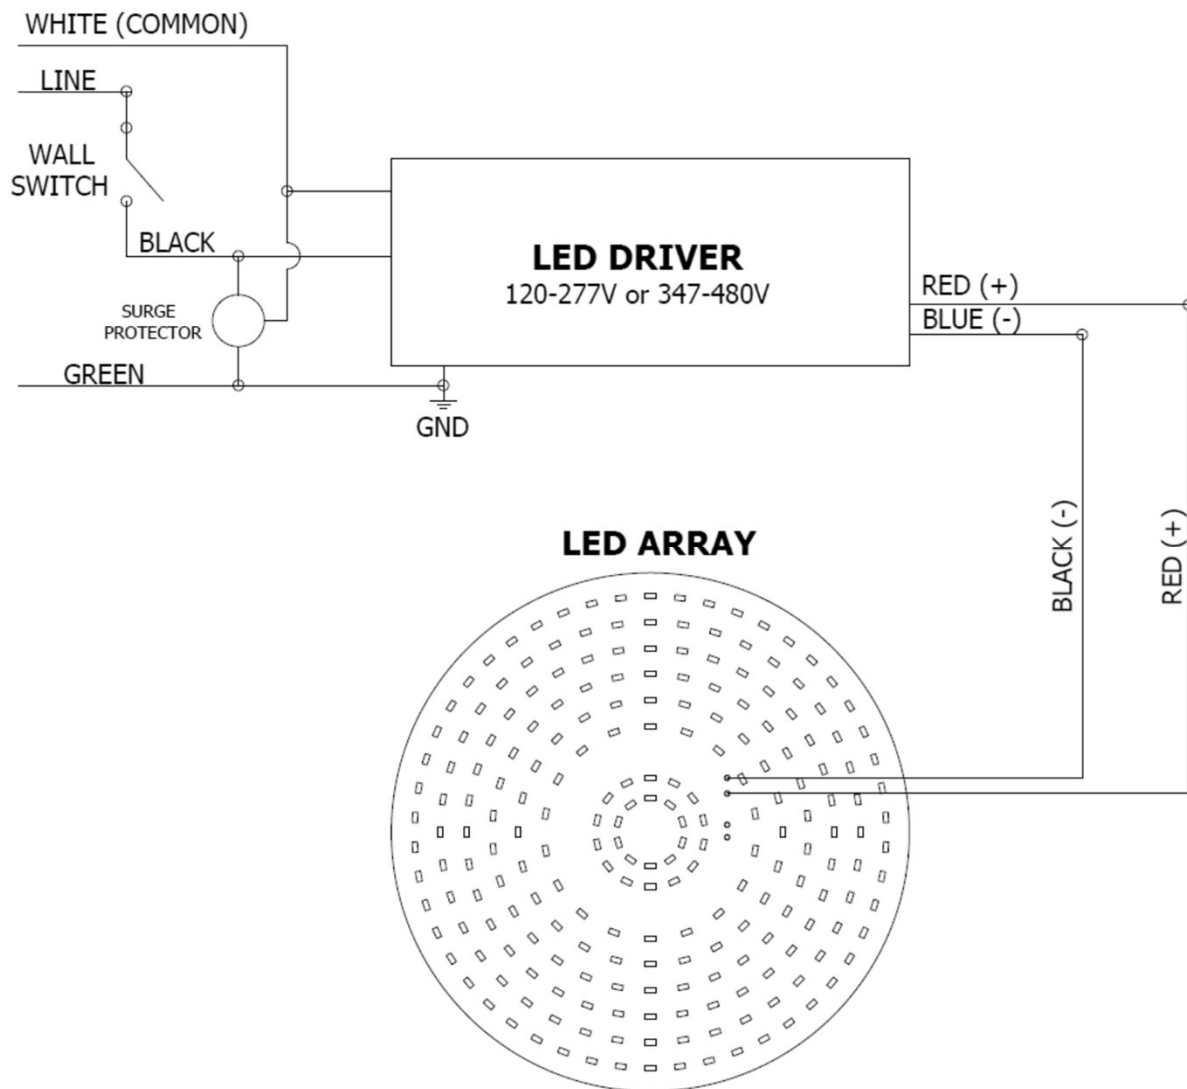

8500 Hansen Rd.
Houston, TX 77075 USA
FPHBIDS

Tel: 713-943-0340

Oct 2022

availinfra.com/rig-a-lite/

Rev. 1