

Certified Reliability in Food Processing

NSF-rated hazardous
location lighting solutions


 **RIG-A-LITE**™



Built for Food Processing Demands

RIG-A-LITE's NSF-rated, washdown-ready fixtures are designed to perform in the harshest food processing conditions. From high heat to corrosive cleaning processes, our durable lighting solutions enhance visibility, safety, and efficiency.

Location Key	
A	Ceiling-Level Lighting Grid
B	Overhead Conveyor System/ High-Risk Contamination Zone
C	Perimeter Areas & Equipment Zones
D	Processing Workstations
E	Stairwells & Platforms

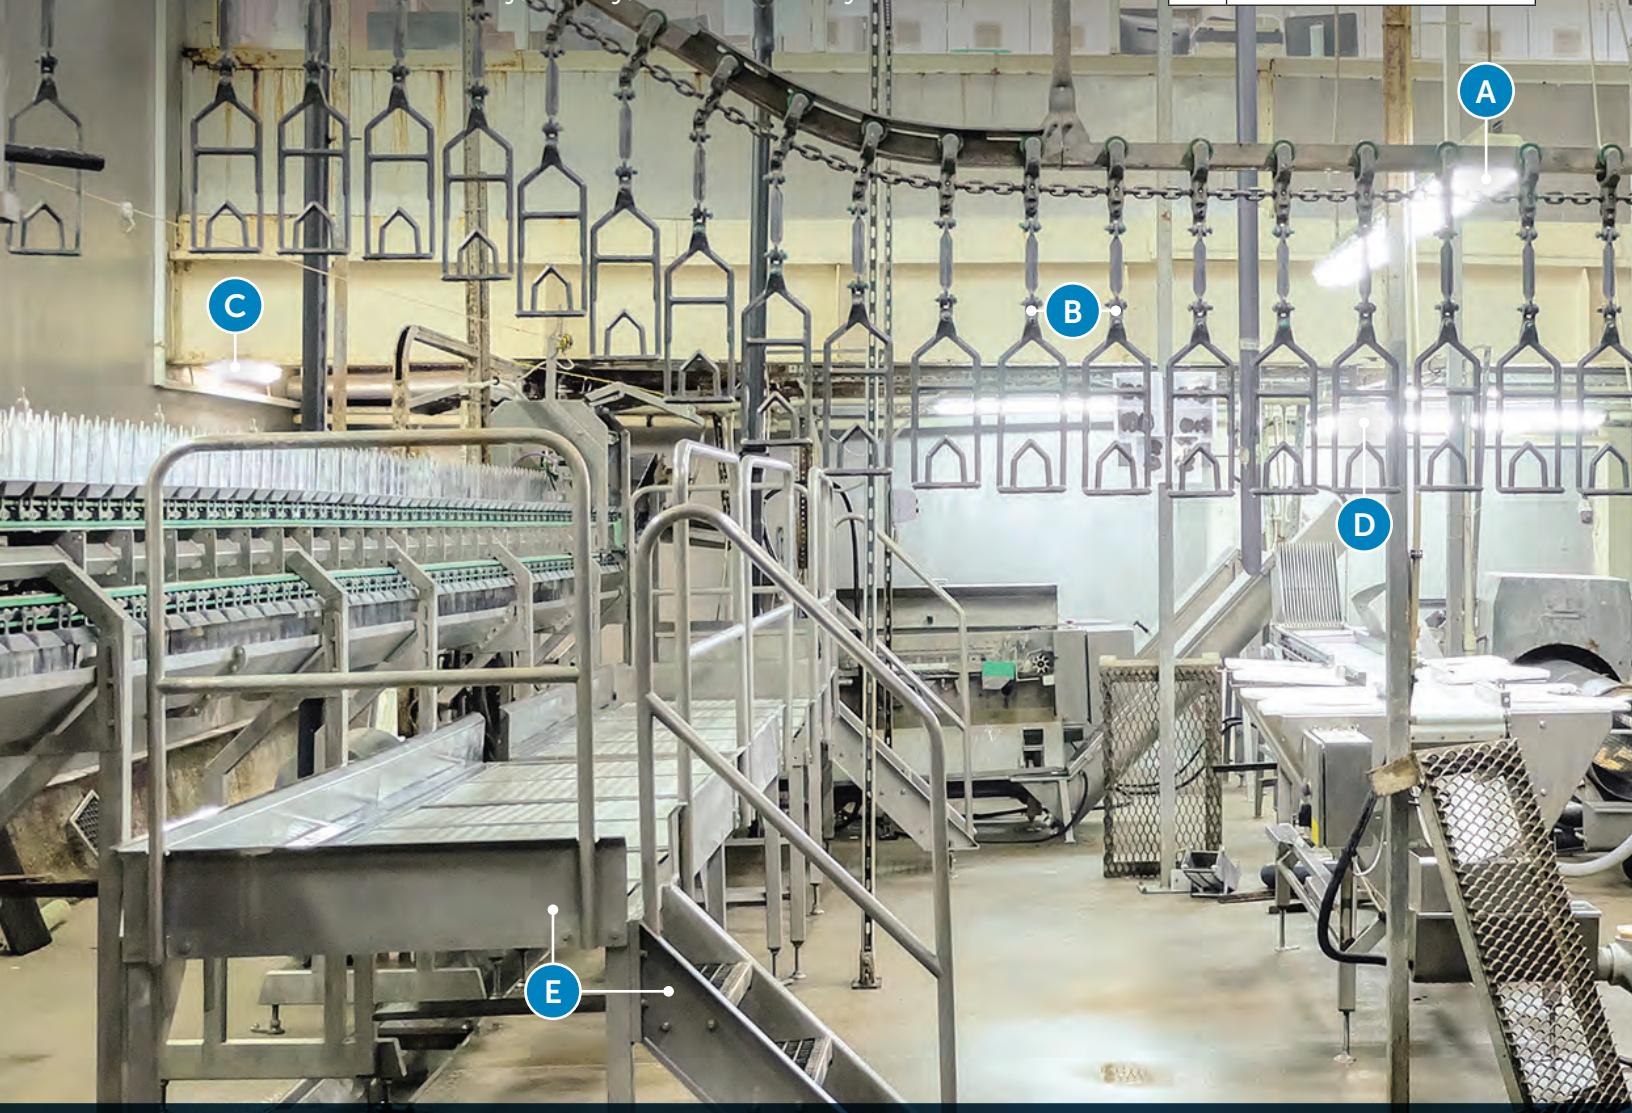

RIG-A-LITE Advantages



Warranties

5- to 10-year warranties depending on fixture and quote. Exact terms provided in your quote.



Custom Brackets

Dual-drilled brackets available for easy retrofit—mounts to any existing fixture, any brand.



Made in the USA

Legacy Series proudly made in the USA.



QuickShip & Stock

QuickShip and stock programs available. Call 713-943-0340 for fast delivery.

Usage and Specifications

Locations	Model	Type	Lumens	Wattage	Classifications & Certifications
C	HNMF2 LED	Hazardous-Rated LED Linear	7,215-11,223	54-80	C1D2, NSF-Certified, UL 844, UL 1598, cUL Listed, NEMA 4X, IP65
B,D	PPF LED	Heavy Duty Harsh-Rated LED Linear	4,169- 16,674	33-130	NSF-Certified, UL 1598, UL 8750, CSA, NEMA 4X, IP69K, LM79/LM80
C	NMF2 LED	Heavy Duty Harsh-Rated LED Linear (non-metallic)	7,208-11,336	54-80	NSF-Certified, UL 1598, UL 5VA Non-Flammable Listed (housing), UL 746C Listed (outdoor use), cUL Listed, NEMA 4X, IP65
C,E	RVT LED	Heavy Duty Harsh-Rated LED Linear (vapor tight)	2,240-6,720	16-48	NSF-Certified (pending), UL 1598, UL 8750, IP65, IK10, RoHS
A,B,D	HFPA LED	Hazardous-Rated LED Area/High-Bay	11,884-31,520	91-249	C1D2, C2D2, C3, NSF-Certified, UL 844, UL 8750, cUL Listed, NEMA 4X, IP66, IP69K
A,B,D	FPHB LED	Heavy Duty Harsh-Rated LED Area/High-Bay	11,884-31,520	91-249	NSF-Certified, UL 1598, UL 8750, UL 924, cUL Listed, NEMA 4X, IP66, IP69K, 85 CRI (select models)
A,B,D	WFH LED	Hazardous-Rated LED High-Bay	18,900	135	C1D2, C2D2, C3, NSF-Certified, UL 844, UL 1598, UL 8750, cUL Listed, NEMA 4X
A,B,D	WFHN LED	Heavy Duty Harsh-Rated LED High-Bay	18,900	135	NSF-Certified, UL 1598, UL 8750, cUL Listed,

NSF-Rated Lighting Solutions

Legacy Series

HNMF2 LED

Hazardous-Rated LED Linear



HFPA LED

Hazardous-Rated LED Area/High-Bay



FPF LED

Heavy Duty Harsh-Rated LED Linear



FPHB LED

Heavy Duty Harsh-Rated LED Area/High-Bay



NMF2 LED

Heavy Duty Harsh-Rated LED Linear (non-metallic)



WFH LED

Hazardous-Rated LED High-Bay



RVT LED

Heavy Duty Harsh-Rated LED Linear (vapor tight)



WFHN LED

Heavy Duty Harsh-Rated LED High-Bay



An Avail Infrastructure Solutions Company

availinfra.com/rig-a-lite

8500 Hansen Road
Houston, TX 77075
(713) 943-0340

© 2026 Avail Infrastructure Solutions 02/2026 GDI