

MHD2/MHDO Series

Marine heavy duty
non-metallic fluorescent

 **RIG-A-LITE™**
An Avail Infrastructure Solutions Company



Classifications

- Class I, Division 2, Groups A, B, C & D
- Class II, Division 2, Groups F & G
- Class III
- Class I, Zone 2 Groups IIA, IIB & IIC (ANSI/UL 844)
- UL 844 Hazardous Locations
- UL 1598A Marine Outside Type
- CUL
- IP66
- 55° C Ambient Temperature
- Buy American Act (BAA) Compliant



availinfra.com/rig-a-lite

8500 Hansen Road
Houston, TX 77075
(713) 943-0340

MHD2/MHDO Series

Marine heavy duty non-metallic fluorescent

Key Features

- 1 Stainless steel mounting brackets
- 2 Captive stainless steel latches
- 3 Non-metallic, glass reinforced polyester housing
- 4 3/4 in. NPT aluminum hub
- 5 Heavy duty aluminum ballast tray
- 6 Heavy duty injection molded lens with reinforced corners



Additional Features

Housing:

- Corrosion free high impact fiberglass housing
- Water tight gasket attached to the lens
- Captive SS latches
- Heavy duty aluminum ballast tray
- 3/4 in. NPT aluminum conduit hubs
- 4 ft. models with 1, 2, or 3 lamp versions

Diffuser:

- High Impact DR acrylic diffuser-polycarbonate option available


Mounting:

- Stainless steel mounting brackets standard

MHD2/MHDO Series

Marine heavy duty non-metallic fluorescent

Catalog Number Logic

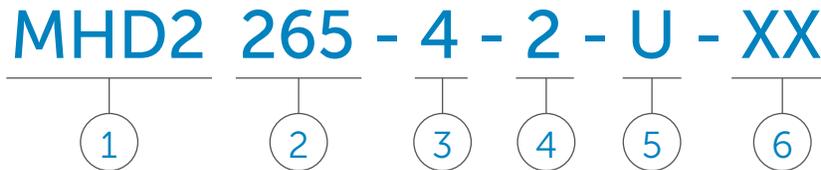

1

BASIC SERIES

MHD2 Non-Metallic Fluorescent Fixture
Class I, Division 2, Groups A, B, C and D
Class II, Division 2, Groups F & G
Class III
Zone 2, Groups IIA, IIB & IIC
UL 1598A Marine Outside Type
UL 844 Hazardous Locations
CUL
55° C Ambient Temperature

MHDO Non-Metallic Fluorescent Fixture
Marine Rated Only

2

LAMP CURRENT/LAMP WATTAGE

800 = 800mA, 60 Watt²
430 = 430mA, 34/20 Watt
(export only)
425 = 425mA, 40/20 Watt (Slimline)
265 = 265mA, 32/17 Watt (T8 Lamps)
T5HO = 54 Watt T5HO
T5 = 28 Watt T5
T8HO = 44 Watt T8HO (4 foot only)

3

NOMINAL FIXTURE LENGTH

4 = 4 Foot

4

NUMBER OF LAMPS

1 = 1 Lamp
2 = 2 Lamps
3 = 3 Lamps¹

5

VOLTAGE/FREQUENCY

E = 12V DC
F = 24V DC
G = 32V DC
H = 347V 60 HZ
N = 347 thru 480V 50/60 HZ
U = 120 thru 277V 50/60 HZ

6

OPTIONS⁴

P = Polycarbonate Lens
EM = Battery Backup
EM NON = Non-Hazardous Emergency
Battery Backup. Marine Only
F = Single Fuse²
FB = Fuse Block²
TB = Terminal Block
TW = Thru Wire
Cable Installations Only
L = Lamps
PM = Pendant Mount

¹ 800, 430, 425mA & T8HO fixtures not available in 1 or 3 lamp versions.

² Fuse option not available for marine listed fixtures.

³ Consult factory for pricing.

Catalog logic is for explaining catalog number structure only. Not all combinations are possible; consult factory for catalog numbers not listed in charts.

Certification Guide

Model	Ambient Temperature (°C)	Class I, Div. 2, Groups A, B, C, & D	Class III, Div. 2, Groups F & G, Class III	Supply Wire Suitable Temp., °C
MHD2 425, 430, 800	40	T4	T3C	90
MHD2 265	40	T4	T3C	90
MHD2 265	55	T4A	-	90
MHD2 T5, T5HO	40	T4	T3C	90
MHD2 T5, T5HO	55	T3C	-	90
MHD2 T8HO	40	T4	T3C	90
MHD2 T8HO	55	T4A	-	90


MHD2/MHDO Series

Marine heavy duty non-metallic fluorescent

Fluorescent Series

(Lamps not included)	Description	Voltage	Catalog Number*
Four Foot Fixture	34 Watt, Rapid Start F40T12, Medium Bi-Pan 430mA, Lamps, 48" (export only)	120-277V 50/60 HZ	MHD2430-4-2-U
	20 Watt, Instant Start, F24T12 Slimline, Single Pin, 425mA, 48"	12V DC	MHD2425-2-2-E
		24V DC	MHD2425-2-2-F
		32V DC	MHD2425-2-2-G
	32 Watt, Rapid Start F32T8, Medium Bi-Pin 265mA Lamps, 48"	120-277V 50/60 HZ	MHD2265-4-2-U
54 Watt, T5HO Miniature Bi-Pin 2 Lamp, 48"	120-277 V 50/60 HZ	MHD2T5HO-4-2-U	

Fixture Dimension (inches)

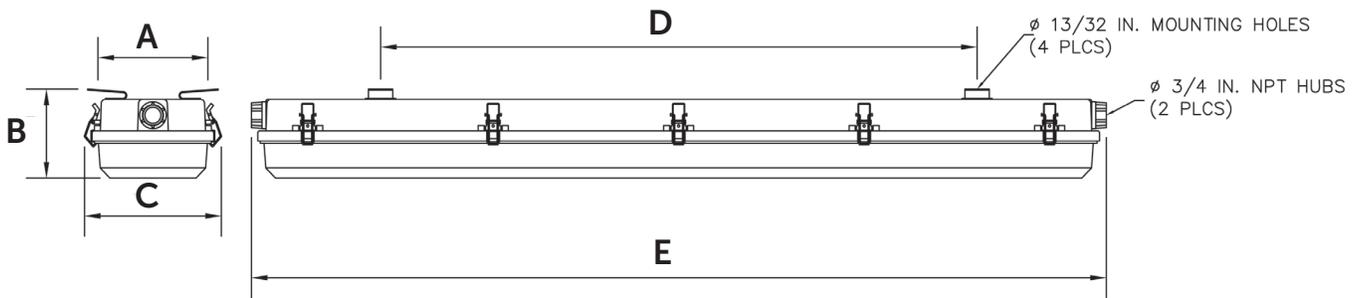

Nominal Fixture Length	A	B	C	D	E	Boxed Weight	Shipping Volume (Boxed Fixture)
Four Foot Fixture	6.88	5.00	7.88	36.63	53.13	25.2 lbs.	2.0 cu. ft.

Accessories

Fixed Mounting Kit

Stainless Steel Fixed 45°

Catalog Number:
53070

Shipping Weight:
2 lbs.



MHD2/MHDO Series

Marine heavy duty non-metallic fluorescent

MHD2265-4-2


Coefficients of Utilization

% Effective Ceiling Cavity Reflectance rcc	80			50			10		
	50	30	10	50	30	10	50	30	10
% Wall Reflectance rw	Effective Floor Cavity Reflectance 20%								
Room Cavity Ratio RCR									
0	.93	.93	.93	.84	.84	.84	.74	.74	.74
1	.76	.71	.66	.68	.64	.61	.59	.57	.54
2	.64	.57	.51	.57	.52	.47	.49	.46	.43
3	.55	.47	.41	.49	.43	.38	.42	.38	.34
4	.48	.39	.33	.43	.36	.31	.37	.32	.28
5	.42	.34	.28	.38	.31	.26	.33	.28	.24
6	.37	.29	.23	.34	.27	.22	.29	.24	.20
7	.33	.26	.20	.30	.24	.19	.26	.21	.18
8	.30	.23	.17	.27	.21	.17	.24	.19	.15
9	.27	.20	.15	.25	.19	.15	.22	.17	.13
10	.25	.18	.14	.23	.17	.13	.20	.15	.12

Candlepower Distribution

Deg.	Parl.	22.5	45	67.5	Norm
0	1094	1094	1094	1094	1094
5	1094	1092	1092	1088	1090
15	1057	1063	1077	1090	1098
25	978	1003	1040	1085	1103
35	867	912	991	1066	1093
45	718	789	906	1010	1043
55	531	632	780	899	932
65	316	440	610	747	781
75	140	268	463	598	631
85	38	147	314	432	458
90	16	102	261	365	402
95	16	78	230	331	373
105	10	41	159	249	292
115	4	16	70	134	172
125	0	2	20	37	57
135	0	0	7	14	16
145	0	0	0	5	8
155	0	0	0	0	1
165	0	0	0	0	0

Photometric Data

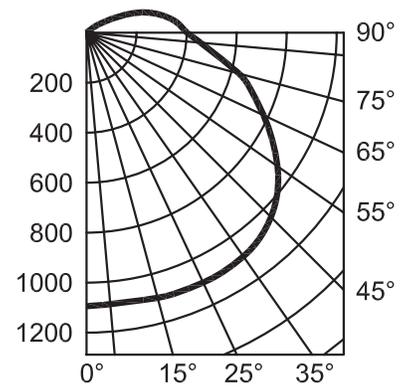

MHD2265-4-3


Coefficients of Utilization

% Effective Ceiling Cavity Reflectance rcc	80			50			10		
	50	30	10	50	30	10	50	30	10
% Wall Reflectance rw	Effective Floor Cavity Reflectance 20%								
Room Cavity Ratio RCR									
0	.93	.93	.93	.84	.84	.84	.74	.74	.74
1	.76	.71	.66	.68	.64	.61	.59	.57	.54
2	.64	.57	.51	.57	.52	.47	.49	.46	.43
3	.55	.47	.41	.49	.43	.38	.42	.38	.34
4	.48	.39	.33	.43	.36	.31	.37	.32	.28
5	.42	.34	.28	.38	.31	.26	.33	.28	.24
6	.37	.29	.23	.34	.27	.22	.29	.24	.20
7	.33	.26	.20	.30	.24	.19	.26	.21	.18
8	.30	.23	.17	.27	.21	.17	.24	.19	.15
9	.27	.20	.15	.25	.19	.15	.22	.17	.13
10	.25	.18	.14	.23	.17	.13	.20	.15	.12

Candlepower Distribution

Deg.	Parl.	22.5	45	67.5	Norm
0	1641	1641	1641	1641	1641
5	1641	1638	1638	1632	1635
15	1585	1594	1616	1635	1647
25	1466	1504	1560	1627	1655
35	1301	1368	1487	1599	1640
45	1076	1184	1359	1515	1565
55	797	948	1170	1348	1398
65	474	660	916	1120	1172
75	211	402	694	987	947
85	58	220	471	647	686
90	23	153	392	548	604
95	23	117	345	496	560
105	16	61	239	373	438
115	6	23	105	201	257
125	0	3	30	56	86
135	0	0	11	20	23
145	0	0	3	8	12
155	0	0	0	0	2
165	0	0	0	0	0

Photometric Data

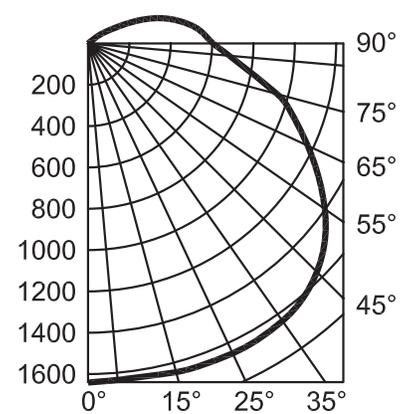

An Avail Infrastructure Solutions Company

availinfra.com/rig-a-lite

8500 Hansen Road
Houston, TX 77075
(713) 943-0340