

NMF2 LED

Non-metallic enclosed and gasketed
LED lighting for harsh environments

 **RIG-A-LITE™**
An Avail Infrastructure Solutions Company



- NEMA 4X
- UL 1598 Wet & Damp Locations
- CUL
- IP65
- NSF Enclosure
- Buy American Act (BAA) Compliant



availinfra.com/rig-a-lite

8500 Hansen Road,
Houston, TX 77075
(713) 943-0340

NMF2 LED

Non-metallic enclosed and gasketed LED lighting for harsh environments

Key Features

- 1 Single piece fiberglass reinforced housing with 1/2 in. conduit ports on each end
- 2 Lens is securely held in place by tool free polymeric latches. Stainless Steel and tamper proof latches are available as options.
- 3 Flexible, impact resistant acrylic lens




Additional Features

- UL 1598 Listed for Wet and Damp Locations
- Fixtures are dust, moisture and corrosion resistant and can be used in many non-hazardous applications
- Housing is UL 5VA non-flammable listed and UL 746C listed for outdoor use
- Can be installed with occupancy sensors or switching devices

NMF2 LED

Non-metallic enclosed and gasketed LED lighting for harsh environments

Catalog Number Logic

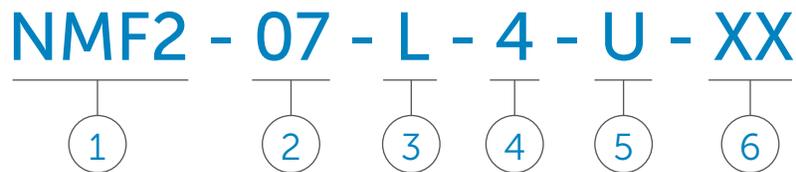

1
SERIES
NMF2

2
LAMP CURRENT/LAMP WATTAGE
07 = 54 Watt (4 foot)
09 = 72 Watt (4 foot)
11 = 80 Watt (4 foot)

3
LAMP TYPE
L = LED

4
NOMINAL FIXTURE LENGTH
4 = 4 Foot

5
VOLTAGE/FREQUENCY
U = 120 thru 277V 50/60HZ

6
OPTIONS¹
P = Prismatic Polycarbonate Lens
EM = Emergency Battery Backup²
F = Inline Fuse
TW = Thru Wire Fittings
Cable Installations Only
TP = Tamper Proof Screw Kit Poly
TPSS = Tamper Proof Screw Kit Stainless
SP = Specular Reflector (85%)
SSL = Stainless Steel Latches
30 = 3000K CCT
35 = 3500K CCT
50 = 5000K CCT

²Max Ambient of 45°C.

Catalog logic is for explaining catalog number structure only. Not all combinations are possible; consult factory for catalog numbers not listed in charts.

Certification Guide

Model	Length	Wattage	Operating Voltage	Total Lumens	Lumens per Watt	CRI	CCT
NMF207L24U	4 ft	54W	120V - 277V 50/60 Hz	7208	141	82	4111
NMF209L24U	4 ft	72W	120V - 277V 50/60 Hz	9643	136	82	4141
NMF211L24U	4 ft	80W	120V - 277V 50/60 Hz	11336	150	833	4126


NMF2 LED

Non-metallic enclosed and gasketed LED lighting for harsh environments

Candlepower Distribution


NMF207LC4U

Deg.	0.	30	60	90
0	2267	2267	2267	2267
10	2257	2234	2222	2221
20	2214	2169	2033	2023
30	2092	2019	1768	1787
40	1857	1794	1591	1605
50	1489	1506	1272	1306
60	975	1060	962	1026
70	522	714	690	756
80	199	332	444	512
90	42	164	254	299

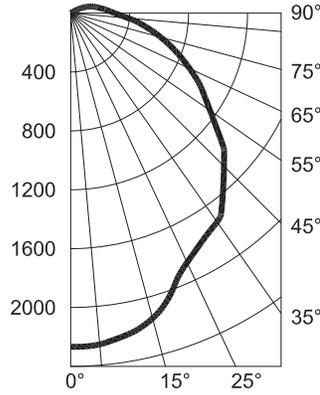


NMF209LC40

Deg.	0.	30	60	90
0	3030	3030	3030	3030
10	3017	2985	2970	2969
20	2959	2898	2717	2703
30	2796	2698	2363	2387
40	2482	2398	2127	2145
50	1990	2012	1700	1745
60	1303	1416	1286	1371
70	698	954	922	1010
80	265	444	593	684
90	56	219	339	399

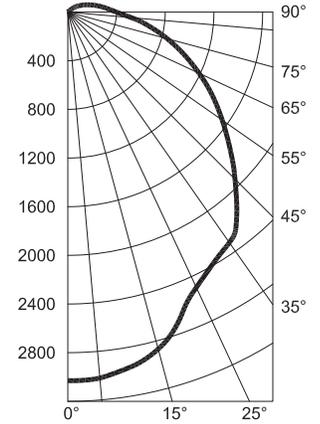

NMF211LC4U


Deg.	0.	30	60	90
0	3567	3567	3567	3567
10	3553	3533	3457	3433
20	3487	3383	3136	3097
30	3298	3150	2800	2817
40	2938	2777	2496	2491
50	2370	2308	1980	2007
60	1559	1643	1502	1577
70	844	996	1086	1197
80	322	531	707	822
90	70	255	408	479

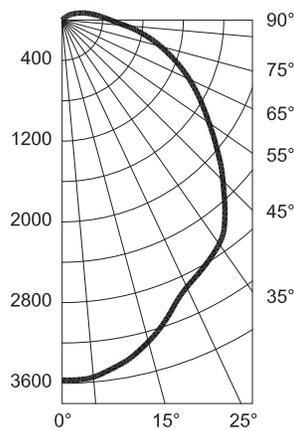

NMF2 LED

Non-metallic enclosed and gasketed LED lighting for harsh environments

Fixture Dimensions (inches)

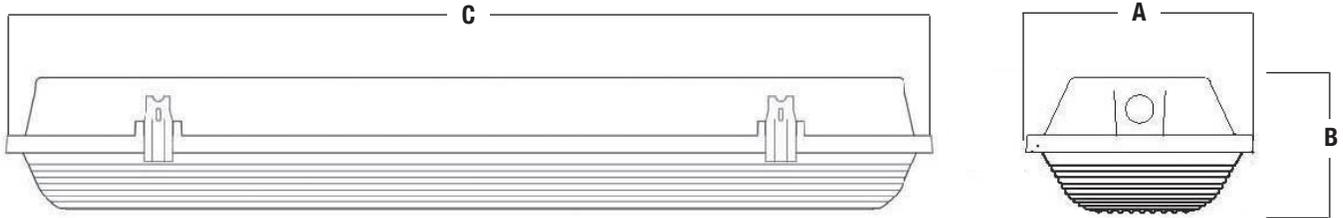

NMF2 Series	Dimensions (inches)			Boxed Weight	Shipping Volume (Boxed Fixtures)
	A	B	C		
4 Foot	4.02	4.38	51.65	12 lbs	2.53 cu. ft.



availinfra.com/rig-a-lite

8500 Hansen Road,
Houston, TX 77075
(713) 943-0340